Header Field	Type
Object name	C-style String
Class type	32-bit Integer
Implementation code	32-bit Integer
Number of instruction sets included	32-bit Integer
Number of functions	32-bit Integer
1st Function name	C-style String
1st Function offset relative to file start	32-bit Offset
Message code for Function 1	32-bit Integer
Message code 1 inside Function 1	32-bit Integer
Message code 2 inside Function 1	32-bit Integer
2nd Function name	C-style String
2nd Function offset relative to file start	32-bit Offset
Message code for Function 2	32-bit Integer
Message code 1 inside Function 2	32-bit Integer
3rd Function name	C-style String
3rd Function offset relative to file start	32-bit Offset
Message code for Function 3	32-bit Integer
Message code 1 inside Function 3	32-bit Integer
Message code 2 inside Function 3	32-bit Integer
...	...

FIG. 1

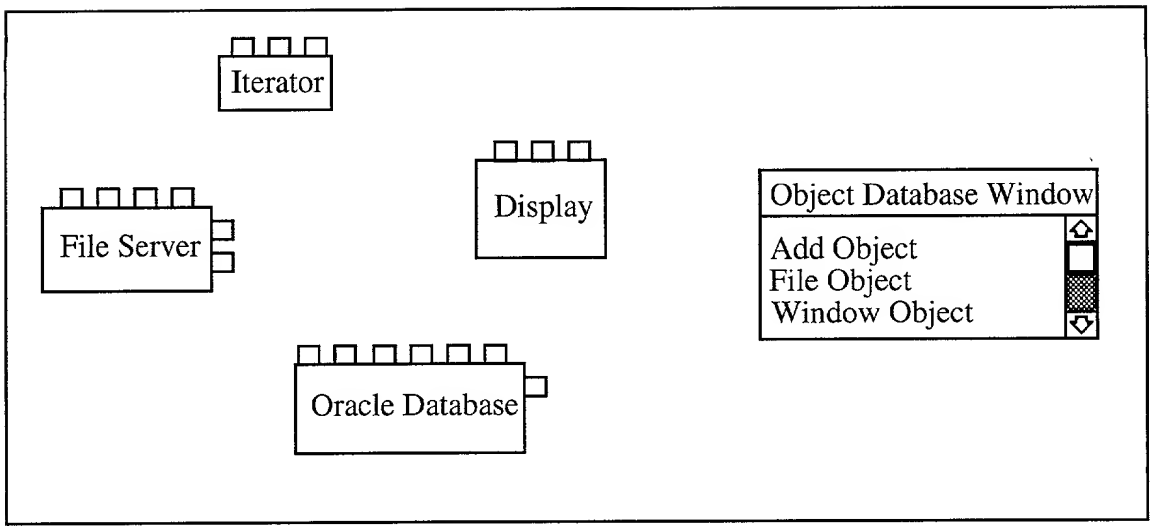
Iterator
Display
File Server
Object Database Window
Add Object
File Object
Window Object
Oracle Database

FIG. 2

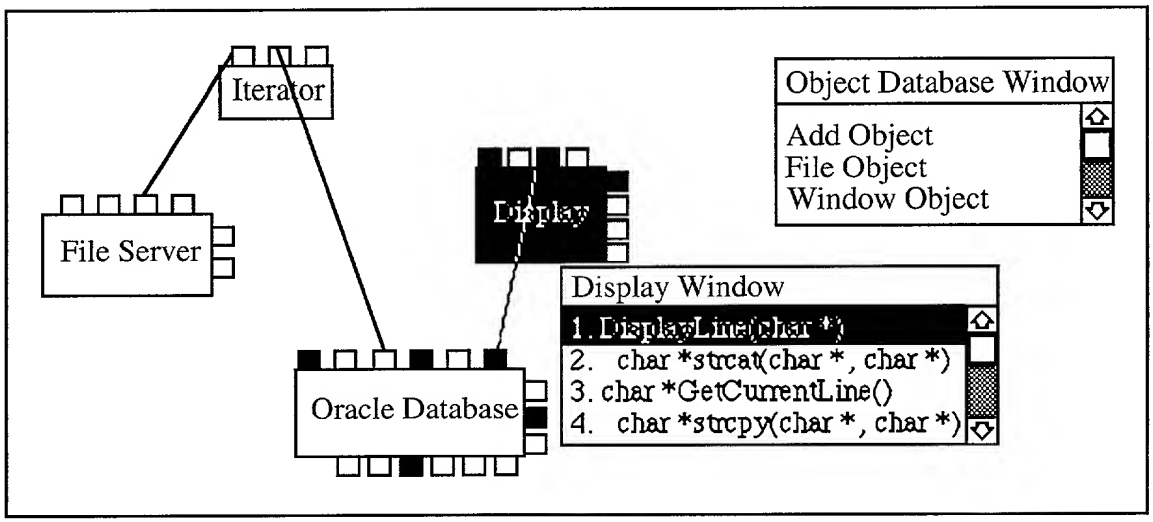
Iterator
Object Database Window
Add Object
File Object
Window Object
Display
File Server
Display Window
1. DisplayLine(char *)
2. char *strcat(char *, char *)
3. char *GetCurrentLine()
4. char *strcpy(char *, char *)
Oracle Database

FIG. 3

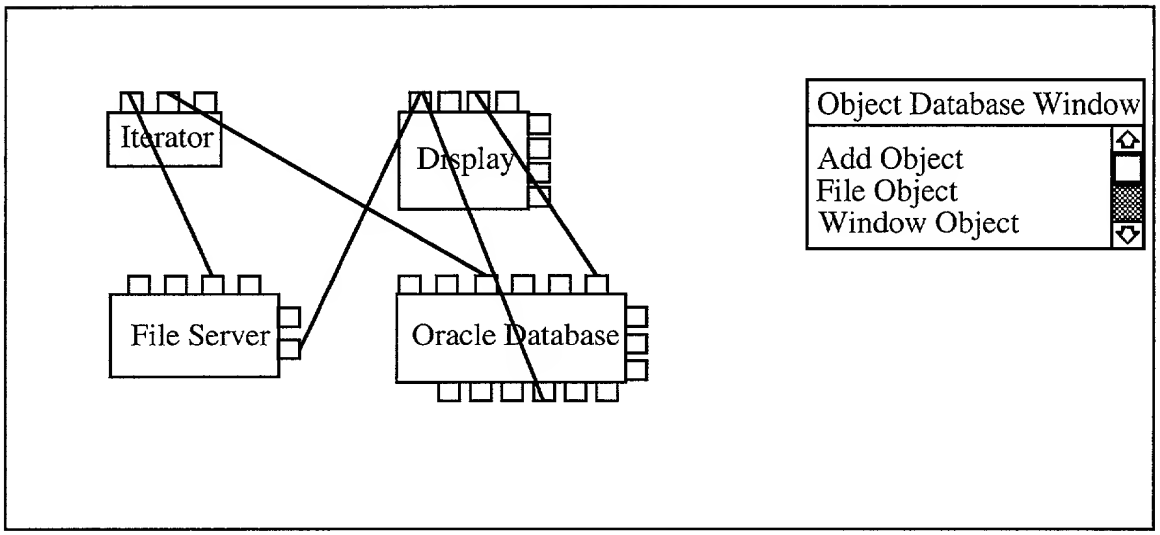
Iterator
Display
File Server
Oracle Database
Object Database Window
Add Object
File Object
Window Object

FIG. 4

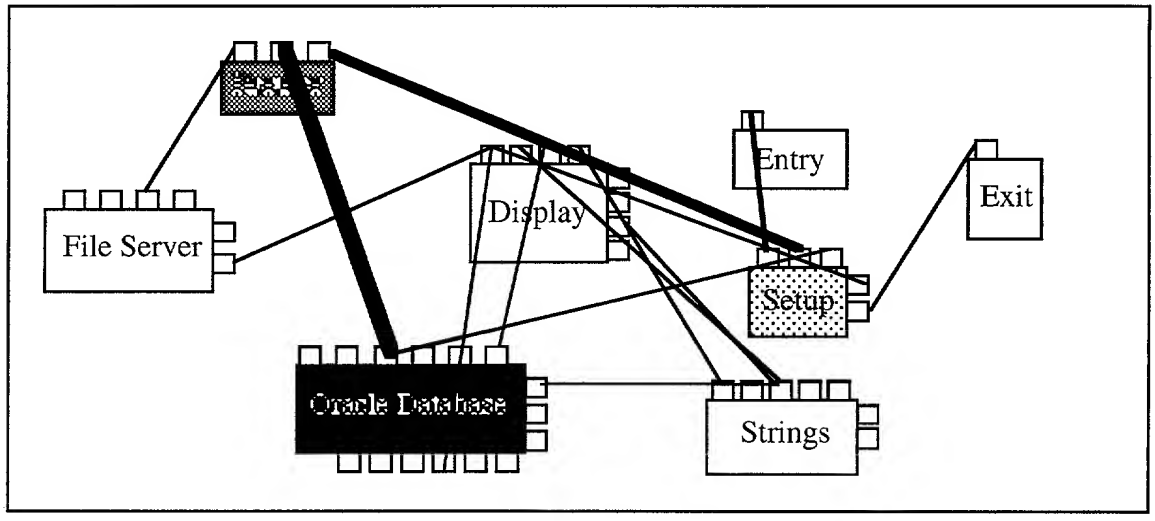
Entry
Exit
File Server
Display
Setup
Oracle Database
Strings

FIG. 5